


Panic Exit device with stand-alone Alarm



EMERGENCY EXIT DOORS

A security solution that is both simple and revolutionary

Where there is no justification for installing a sophisticated access-control and maintenance system, JPM has come up with this first mechanical Anti-Panic Push Bar that can sound an alarm if an unauthorised exit is made. The Push Bar Alarm is certified to EN 1125 CE standard, and is fitted with a stand-alone integrated alarm. A unique solution for small and medium-sized retail outlets with high exposure to theft.

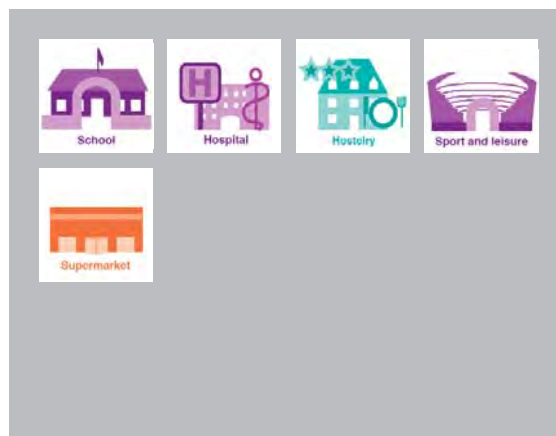

Technical datas



Rim panic exit device with horizontal action touch bar and stand-alone alarm

- Versions:
 - Side latch rim lock (1 latch)
 - Top and bottom rim lock (2 latches)
 - Side, Top and Bottom rim lock (3 latches)
- Non handed
- Main case with cross follower
- Bar adjustable on site (400 to 200 mm depending on models). Bar must remain equal to 60% of the door width.
- Maximum projection: 60 mm
- Resistance to corrosion - 96 hours in salt spray or 240 for multipoints version
- In compliance with security regulations against fire in public places (art. C045)
- 9 VDC battery supplied
- Can be fitted on two hours fire - Rated doors
- Cylinder: 40 mm - Half european type cylinder - Sold separately

PUSH BAR 90+ 1 side latch

- Deadlocking latch bolt preventing the retraction of the horizontal bolt from outside, and which effectively contributes to the door's resistance to fire.

PUSH BAR 90+ top and bottom latches

- Top and bottom latches with automatic relatching, keeping the latches retracted when the door is open (thus avoiding contact with the floor)
- Anti-picking device on top and bottom latches for improved resistance to breaking and entering from outside, and an excellent resistance to fire
- Set of threaded rods and protective rod covers

PUSH BAR 90+ Side + top and bottom latches

- Top and bottom latches with automatic relatching, keeping the latches retracted when the door is open (thus avoiding contact with the floor)
- Anti-picking device on top and bottom latches for improved resistance to breaking and entering from outside, and an excellent resistance to fire
- Set of threaded rods and protective rod covers
- Certification NF QE+C.
- Mark CE - EN1125.

Special features

SAFETY:

- Products holder of the NF mark.
- Products designed for fitting to Emergency Exits.
- Standard models can be fitted to fire-rated door units.
- CE EN-1125 approved.

THE CHARACTERISTICS approved by the NF mark are:

- Opening with a weak push by elderly people or children.
- Opening in a situation of panic.
- Endurance, durability, resistance.
- In compliance with security regulations against fire in public places (art. C045).

PERFORMANCE:

- Top and bottom latches with automatic relatching, keeping the latches retracted when the door is open (thus avoiding contact with the floor).
- Anti-picking device on top and bottom latches for improved resistance to breaking and entering from outside, and an excellent resistance to fire.

- Resistance to corrosion - 96 hours in salt spray or 240 for multipoints version.
- 90 Db alarm.
- Flashing red LED.
- Key resetting.
- 9 VDC battery.